



Ultrafabrics Digital Binder



Breathable Technology

Fabrics That Breathe

Available in a variety of grain styles, these materials provide the ultimate luxury and functionality. Engineered with a proprietary ventilation system to enhance softness, promote air circulation, and absorb unwanted noise, these fabrics breathe for the highest level of comfort and performance.



Brisa — Ultrafabrics



533-3775 Mystic Beige



533-3775 Mystic Beige



533-3019 Birch



533-3863 Cream



533-3822 Bone



533-3946 New Sand



533-3051 Ginger



533-3276 Wishbone



533-3915 Putty



533-3823 Aztec



533-5747 White



533-3277 Moon



533-5820 Quicksilver



533-3914 Bark



533-3591 Caramel



533-5703 Wrought Iron



533-6528 Clear Quartz



533-5802 Ash



533-3022 Shiitake



533-3200 Peat



533-5749 Black Onyx



533-5360 Hazy



533-4488 Olive




533-3023 Coffee Bean




533-3913 Truffle



533-3864 Desert Clay



533-6596 Ice Pink




533-3272 Iceberg




533-2698 Sterling Blue




533-4345 Honeydew




533-8269 Yukon Gold



533-1383 Pompeian Red




533-2793 Harbor Mist



533-2697 Mineral




533-4361 Lambs Ear




533-8202 Koi



533-1344 Rose Red



533-2645 Cambridge Blue




533-2621 Blue Sea



533-4510 Celery




533-8245 Cinnabar



533-1361 Beet Root




533-2694 Night Navy



533-2794 Rising Tide



533-4487 Sage



533-1373 Salsa




533-9400 Cabernet



533-2620 Evening Blue




533-2696 Skyway




533-4448 Apple Green




533-3825 Canyon




533-9378 Abyss



533-2683 Indigo




533-4303 Seaweed




533-4302 Esmeralda



Acoustics*



Breathable
Comfort



Recycled Bottles &
Renewable Fibers

Applications

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Recycled Polyester, 35% FSC/PEFC
Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

16 Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Air Permeability: ASTM D737

Sound Absorption: ASTM C423


Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Environmental

No intentionally added PFAS
SCS Indoor Advantage certified
REACH compliant
Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

* Acoustic applications only available in North America




ultrafabricsinc.com

Ultrafabrics® and logo, and Brisa® are registered trademarks of Ultrafabrics Inc. Made in Japan.



Brisa Distressed — Ultrafabrics




535-3274 Coyote



535-3021 Manila




535-3480 Navajo Ivory



535-3134 Buckskin




535-3340 Desert Tan




535-3271 Koala



535-3273 Shield




535-3024 Chamois




535-3980 Waylan




535-3869 Muslin




535-5679 Iron




535-3871 Moccasin




535-3137 Saddle



535-3972 Lasso




535-4512 Prairie



535-3232 Railroad




535-3231 French Roast




535-3201 Bison




535-3976 Bridle



535-3870 Pelt




535-5773 Stormy




535-3974 Steerhide



Acoustics*



Breathable
Comfort



Recycled Bottles &
Renewable Fibers

Applications

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Recycled Polyester, 35% FSC/PEFC
Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

8"V x 10.5"H / 203mm V x 267mm H

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 160,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

16 Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Air Permeability: ASTM D737

Sound Absorption: ASTM C423

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Environmental

No intentionally added PFAS
SCS Indoor Advantage certified
REACH compliant
Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

* Acoustic applications only available in North America



ultrafabricsinc.com


Ultrafabrics® and logo, and Brisa® are registered trademarks of Ultrafabrics Inc. Made in Japan.



Brisa Forecast & Brisa Frontier — Ultrafabrics



393-5852 Jasper

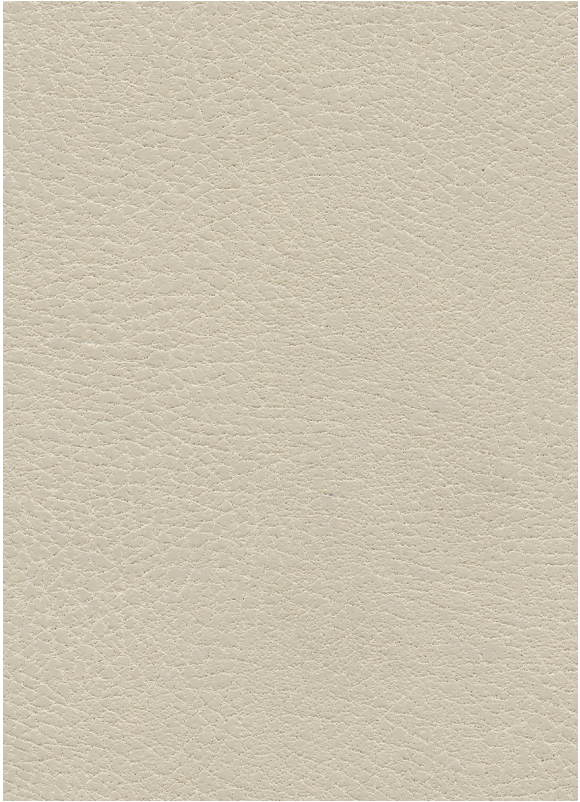


396-3361 Mohave*




393-5750 Polar



396-3361 Mohave*




396-3024 Chamois*




393-4529 Glass




393-5852 Jasper




396-3134 Buckskin*




396-3980 Waylan*




393-4528 Sea Green



393-5875 Nimbus




396-3733 Greige*



396-3972 Lasso*



393-1331 Burnt Red




393-2542 Michigan Blue




393-5749 Black Onyx

*Brisa Frontier



Outdoor Living



Breathable Comfort



Recycled Bottles & Renewable Fibers

Applications

Interior Upholstery, Exterior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Recycled Polyester, 35% FSC/PEFC
Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

8"V x 10.5"H / 203mm V x 267mm H

(Brisa Frontier)

Performance

Abrasion:

ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 100,000- 140,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

16 Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Colorfastness

Light:

ASTM G154, 1000 Hours
ISO 105 B02, Grade 8

Crocking:

AATCC 8, Grade 4-5 Wet & Dry

Chlorinated Water:

AATCC 162, Class 4-5

Perspiration:

AATCC 15, Class 5

Sea (Salt) Water:

AATCC 106, Class 4-5

Environmental

No intentionally added PFAS
SCS Indoor Advantage Gold certified
REACH compliant



Brisa Forecast



Brisa Frontier

Scan QR code
for a full list of
specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com

Ultrafabrics® and logo, and Brisa® are registered trademarks of Ultrafabrics Inc. Made in Japan.




Timeless Grains

Enduring Designs


These collections are expertly engineered to offer optimal durability and unrivaled softness for designs that withstand the test of time. From subtle grains to pebbled textures, these timeless fabrics will add sophisticated endurance to any project.



Coast — Ultrafabrics

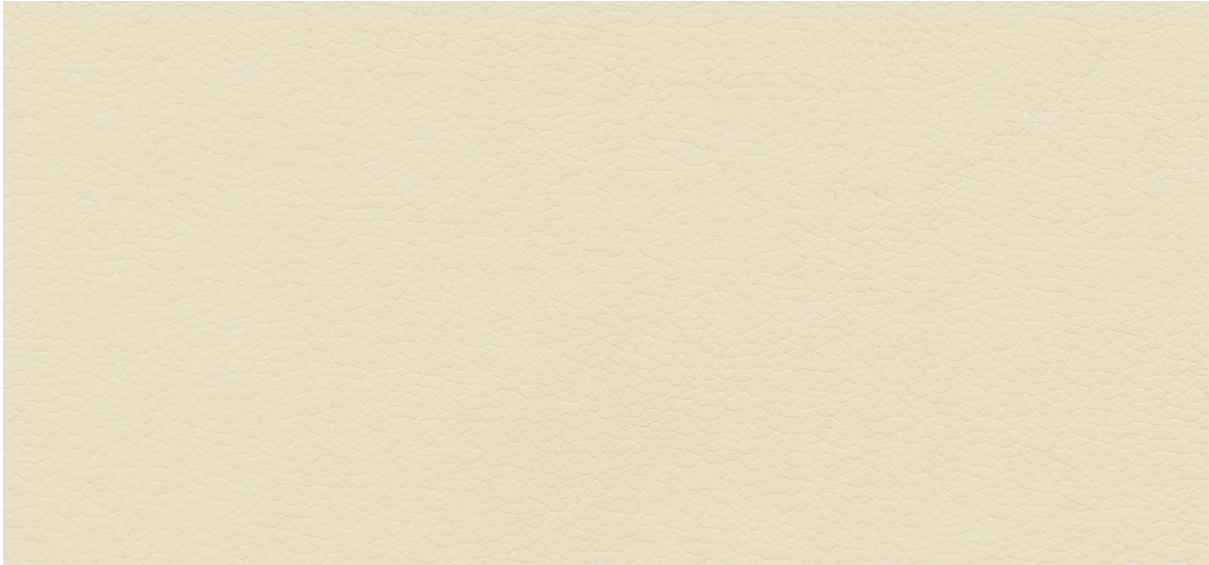

640-0042 Beacon



640-0021 Snow Cap




640-6508 Dolphin



640-3797 Conch



640-3890 Cabana



640-5968 Feather



640-2579 Glacial



640-6086 Walrus Grey



640-3880 Savanna



640-3837 Bungalow



640-2590 Raindrop



640-7230 Calypso



640-5381 Black Moor




640-3881 Dusty Earth



640-3879 Terra




640-2776 Naval Blue




640-4338 Stem Green



Antimicrobial



Outdoor Living



Recycled Bottles & Renewable Fibers

Application

Interior Upholstery, Exterior Upholstery

Ideal for exterior marine seating and high exposure furniture applications

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Recycled Polyester, 35% FSC/PEFC
Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 180,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Colorfastness

Light:

ASTM G154, 1000 Hours

SAE J2527 1500 kj, Grade 4

ISO 105 B02, Grade 8

Crocking:

AATCC 8, Grade 4-5 Wet & Dry

Chlorinated Water:

AATCC 162, Class 4-5

Perspiration:

AATCC 15, Class 5

Sea (Salt) Water:


AATCC 106, Class 4-5

Environmental

No intentionally added PFAS

SCS Indoor Advantage Gold certified

REACH compliant



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



INDOOR ADVANTAGE GOLD FURNITURE

ultrafabricsinc.com


Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.



Pearlized — Ultrafabrics



322-5420 Pure Silver



322-0068 Opal Dream



322-8285 Golden Ore




322-5975 Mirror



322-7228 Pink Quartz



322-9470 Lavender Agate



322-5976 Tin Man



322-3174 Mica




322-5768 Pewter




322-7225 Rose Pearl



322-1468 Ruby Crush



322-2705 Metallic Blue



322-4386 Beryl Green




322-5814 Licorice




322-8208 Spice



322-6558 Pharoah




322-2691 Midnight



322-4304 Oz



Renewable
Fibers

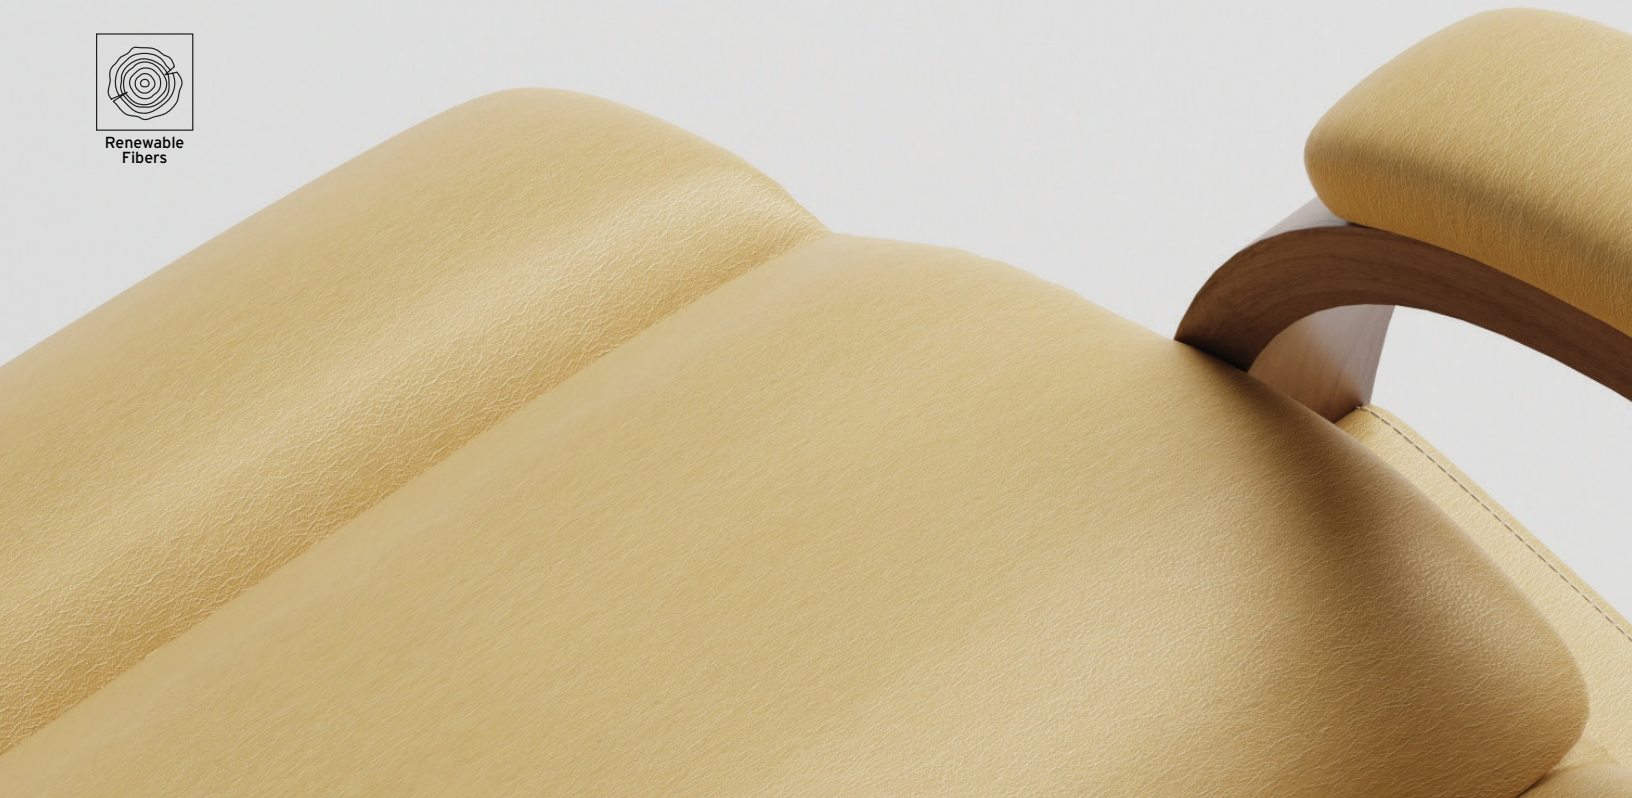

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
100% FSC/PEFC Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 180,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Environmental

No intentionally added PFAS
SCS Indoor Advantage certified
REACH compliant
Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.




Promessa — Ultrafabrics




363-5354 Galaxy Fog




363-5715 Snow




363-5818 Ash



363-5817 Shale




363-5011 Battleship




363-5845 Ebony




363-3464 Tusk




363-3463 Cocoa



363-3785 Desert Taupe




363-3391 Sparrow




363-3037 Horsehair




363-3152 Parchment




363-3142 Camel




363-2695 Aquamarine




363-7239 Aqua Spring




363-3189 Barley




363-3145 Bronze




363-2604 Stone Blue




363-7309 Malibu




363-3786 Buttered Toffee




363-1444 Fireclay




363-2792 Lake Blue




363-4362 Old Lime




363-5258 Sun Shower




363-1387 Dogwood




363-2672 Corn Flour




363-4363 Olive Moss




363-3141 Fields




363-1443 Rumba Red




363-2680 Atlantic




363-7273 Aspen Green



363-3462 Woodpecker



363-9414 Merlot



363-9387 Moroccan Fig



Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Recycled Polyester, 35% FSC/PEFC
Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 180,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Environmental

No intentionally added PFAS

SCS Indoor Advantage certified

REACH compliant

Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.




INDOOR ADVANTAGE GOLD
FURNITURE

ultrafabricsinc.com

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.




Pumice — Ultrafabrics

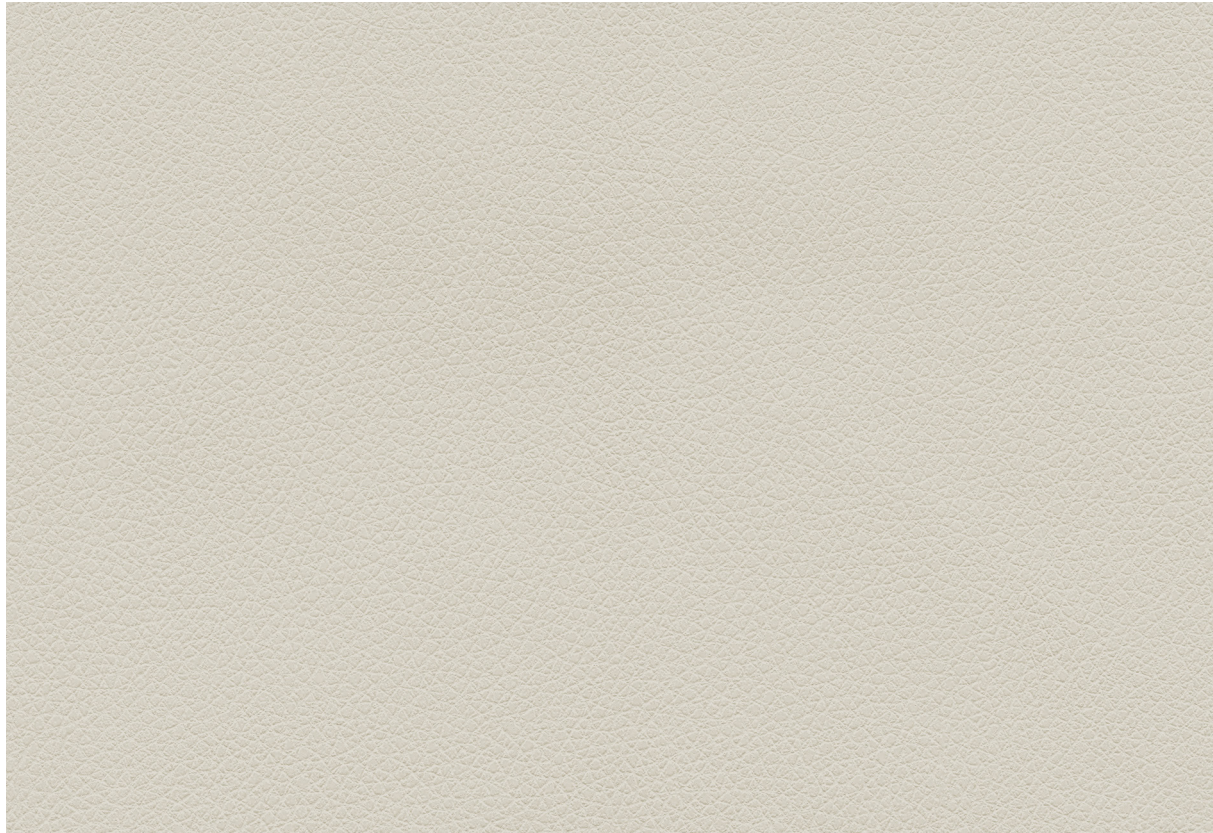


497-0017 Whitewater



497-0047 White Shore



497-3260 Seahorse



497-6601 Coral Glow




497-4372 Dusk Green




497-6533 Hail



497-5969 Propeller




497-5203 Sunbeam



497-8279 Summer Melon




497-4373 Dusty Olive



497-2818 Blue Ice




497-5394 Pewter Cast



497-4018 Oar



497-8280 Aztec Clay




497-6534 Anchor Gray




497-2778 Hightide



Antimicrobial



Outdoor Living



Recycled Bottles & Renewable Fibers

Application

Interior Upholstery, Exterior Upholstery

Ideal for exterior marine seating and high exposure furniture applications

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Recycled Polyester, 35% FSC/PEFC
Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 200,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Colorfastness

Light:

ASTM G154, 1000 Hours

SAE J2527 1500 kj, Grade 4

ISO 105 B02, Grade 8

Crocking:

AATCC 8, Grade 4-5 Wet & Dry

Chlorinated Water:

AATCC 162, Class 4-5

Perspiration:

AATCC 15, Class 5

Sea (Salt) Water:


AATCC 106, Class 4-5

Environmental

No intentionally added PFAS

SCS Indoor Advantage Gold certified

REACH compliant



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

ultrafabricsinc.com

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.




INDOOR ADVANTAGE GOLD FURNITURE


Summit — Ultrafabrics



421-3270 Barro




421-3357 Cream




421-3578 Stone



Antimicrobial



Outdoor Living



Recycled Bottles & Renewable Fibers

Application

Interior Upholstery, Exterior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Recycled Polyester, 35% FSC/PEFC
Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 160,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Colorfastness

Light:

ASTM G154, 1000 Hours

SAE J2527 1500 kj, Grade 4

ISO 105 B02, Grade 8

Crocking:

AATCC 8, Grade 4-5 Wet & Dry

Chlorinated Water:

AATCC 162, Class 4-5

Perspiration:

AATCC 15, Class 5

Sea (Salt) Water:

AATCC 106, Class 4-5

Environmental

No intentionally added PFAS

SCS Indoor Advantage Gold certified

REACH compliant



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com


Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.




Tottori — Ultrafabrics



601-5998 Rice Paper



601-3418 Origami White



601-3120 Udon



601-3348 Ginseng



601-2622 Blue Mirage



601-5037 Classic Grey




601-5998 Rice Paper



601-3280 Tatami Mat



601-3300 Terrain



601-2595 Hot Spring




601-9362 Orchid




601-5033 Sand Castle



601-3386 Desert Dune



601-4312 Lichen



601-2515 Shibori Blue




601-1404 Rouge




601-3400 Soba




601-3297 Soy Sauce



601-4346 Dark Spruce



601-5020 Black Sesame

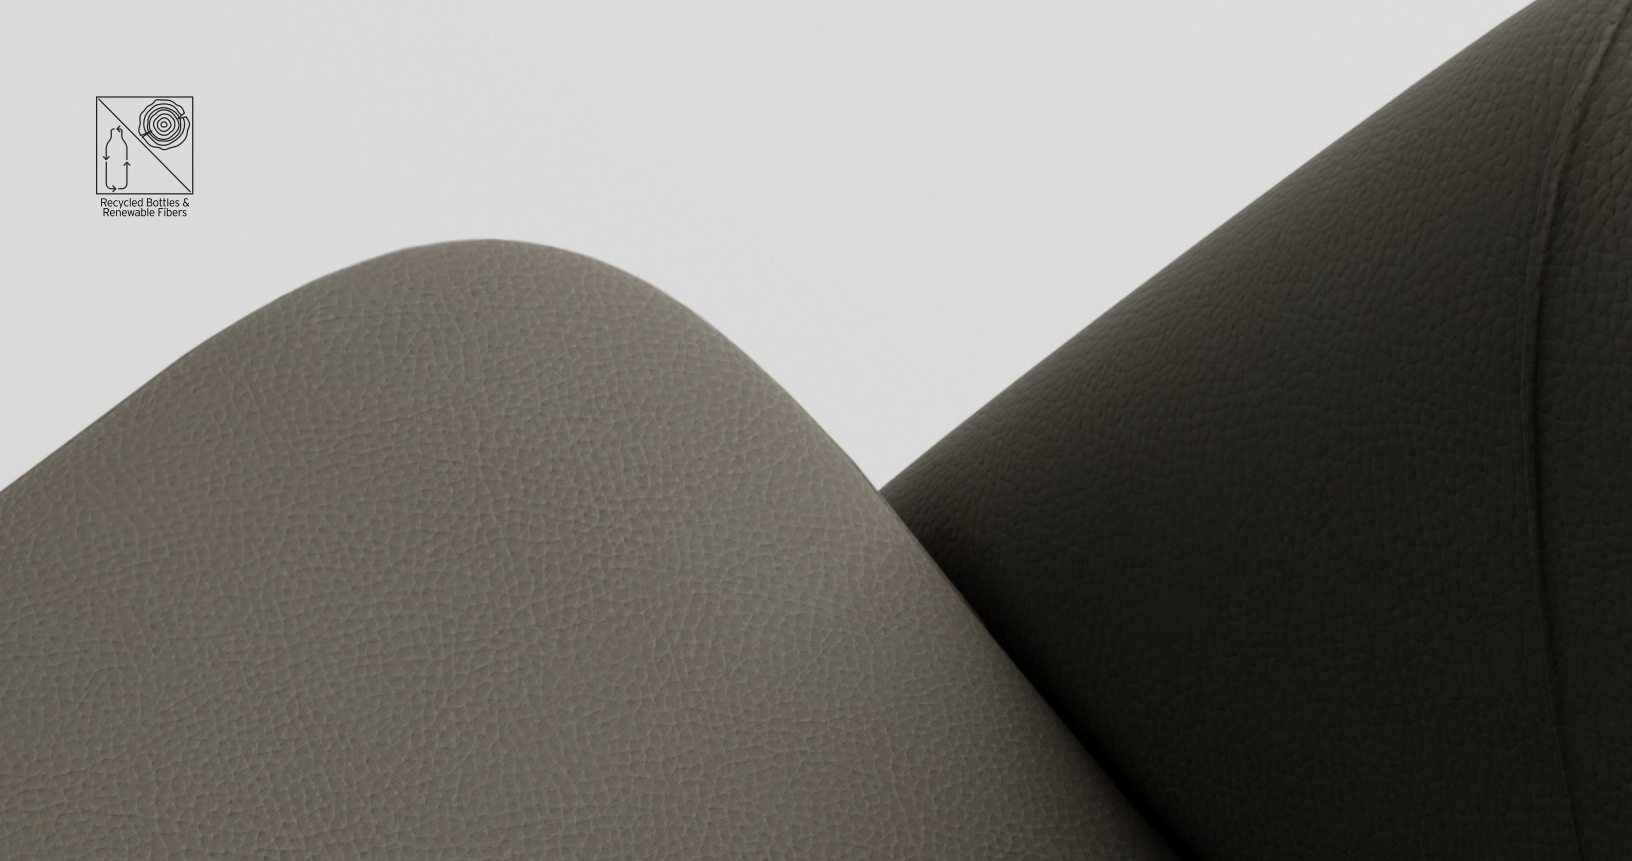

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Recycled Polyester, 35% FSC/PEFC
Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 200,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry


Environmental

No intentionally added PFAS

SCS Indoor Advantage certified

REACH compliant

Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.




INDOOR ADVANTAGE GOLD
FURNITURE

ultrafabricsinc.com

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.



Ultraleather — Ultrafabrics

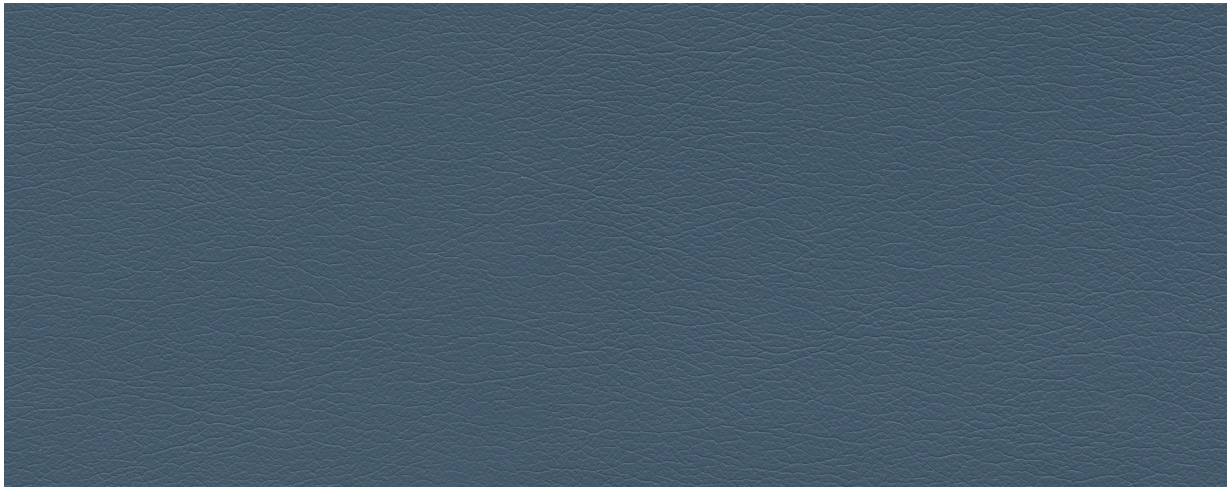

291-2716 High Seas



291-0001 White



291-5714 Ice



291-5776 Classic Grey



291-5684 Arctic



291-5805 Ermine



291-5668 Silver Pearl



291-5666 Dove Grey



291-5676 Pelican



291-3286 Moth Wing



291-3601 Doe



291-5806 Schooner



291-5040 Elephant



291-5374 Flagstone



291-3602 Stone



291-1256 Papyrus



291-5607 Raven Wing



291-5708 Granite



291-5763 Charcoal



291-3287 Cocoa Nib



291-3666 Fudge



291-3700 Ivory



291-3599 Almond



291-3455 Milkweed



291-3851 Chamois



291-3612 Curry



291-3720 Light Oyster



291-3719 Champagne



291-3609 Buff



291-8272 Citronella



291-8271 Canyon Clay



291-3729 Tan



291-3850 Sand



291-3926 Cashmere



291-5250 Sassy



291-1412 Earthenware



291-3183 Pine Cone



291-3779 Taupe



291-3778 Pecan



291-8243 Apricot



291-1347 Poppy



291-3777 Walnut



291-3523 Cave



291-3610 Hide



291-8233 Autumn Leaf



291-1176 Red



291-7214 Boysenberry



291-2508 Rain Dance



291-2553 Cyan



291-4430 Eucalyptus




291-5200 Citrus



291-1311 Brick



291-2478 Diplomat Blue



291-2527 Lagoon



291-4314 Herbal Mist



291-4460 Parrot



291-1312 Chianti



291-2556 Admiral



291-2552 Riviera



291-2507 St. John




291-4366 Olive Leaf



291-3469 Garnet



291-2551 Baltic



291-2685 Bayou



291-7234 Emerald Isle



291-4454 Sonora



291-3205 Hot Chocolate




291-9385 Plum




291-2555 Nile



291-2509 Poseidon



291-4351 Shetland



Applications

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
100% FSC/PEFC Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 180,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

16 Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Colorfastness

Light:


AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking:

AATCC 8, Grade 4-5 Wet & Dry

Environmental

No intentionally added PFAS
SCS Indoor Advantage certified
REACH compliant
Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.




Ultraleather Anti-Static — **Ultrafabrics**



329-5810 Black



Anti-Static



Renewable
Fibers

Ultraleather Anti-Static

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
100% FSC/PEFC Certified Rayon Backing

Weight:

Approx. 9.7 oz. Per Square Yard
Approx. 330 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 180,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

16 Weeks
ASTM 3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Tensile Strength: BS EN ISO 1421

Electrical Resistivity of Fabrics: ASTM D257
≤ 10⁷ OHMS

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4.5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)
- IMO FTPC Part 8

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.
12/24



Modern Textures

Statement Makers

For design-forward projects that demand something different. These future-focused textures have been crafted with the most advanced technology that delivers superior performance and a truly sensorial experience.



Eco Tech — Ultrafabrics



394-3801 Gypsum




394-6540 Whisper



394-3801 Gypsum




394-3622 Limestone



394-3709 Brownstone



394-4408 Komodo



Renewable
Fibers



Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
100% FSC/PEFC Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 150,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 200,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Environmental

No intentionally added PFAS
SCS Indoor Advantage certified
REACH compliant
Does not contain any Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.



Volar Bio — Ultrafabrics



630-5004 Fortress



630-6549 Silverstone




630-3842 Burlap



630-5877 Porcini



630-6018 Gravity



630-4329 Matcha



630-5004 Fortress



630-3893 Bramble




630-8252 Monarch



630-2725 Macaw




630-7290 Mint




630-6073 Pitch Black




630-8258 Café Noir




630-1407 Scarlet




630-2749 Indigotin



630-4335 Spinach



Bio-based
Ingredients



Recycled Bottles &
Renewable Fibers

Application

Interior Upholstery

General Specifications

Composition:

Proprietary Polycarbonate + Biobased Surface
65% Recycled Polyester, 35% FSC/PEFC
Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 300,000 Double Rubs (Wyzenbeek)*

BS EN ISO 12947-2 / 200,000 Rubs (Martindale)*

*meets or exceeds

Hydrolysis:

16 Weeks

ASTM D3690 Sect. 6.11 (Hydrolytic Stability)

ISO 1419 Method C (Accelerated Ageing)

Biobased Carbon Content:

29%

ASTM D6866-18 (Method B)

ISO 16620-2; 2015

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Environmental

No intentionally added PFAS

SCS Indoor Advantage certified

REACH compliant

Does not contain any Red List chemicals

Contains a 66% mix of recycled, rapidly renewable, and
biobased content



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



INDOOR ADVANTAGE GOLD
FURNITURE




USDA
CERTIFIED
BIOBASED
PRODUCT
PRODUCT 29%

ultrafabricsinc.com


Ultrafabrics® and logo are registered trademarks of
Ultrafabrics Inc. Made in Japan.




Wired — Ultrafabrics

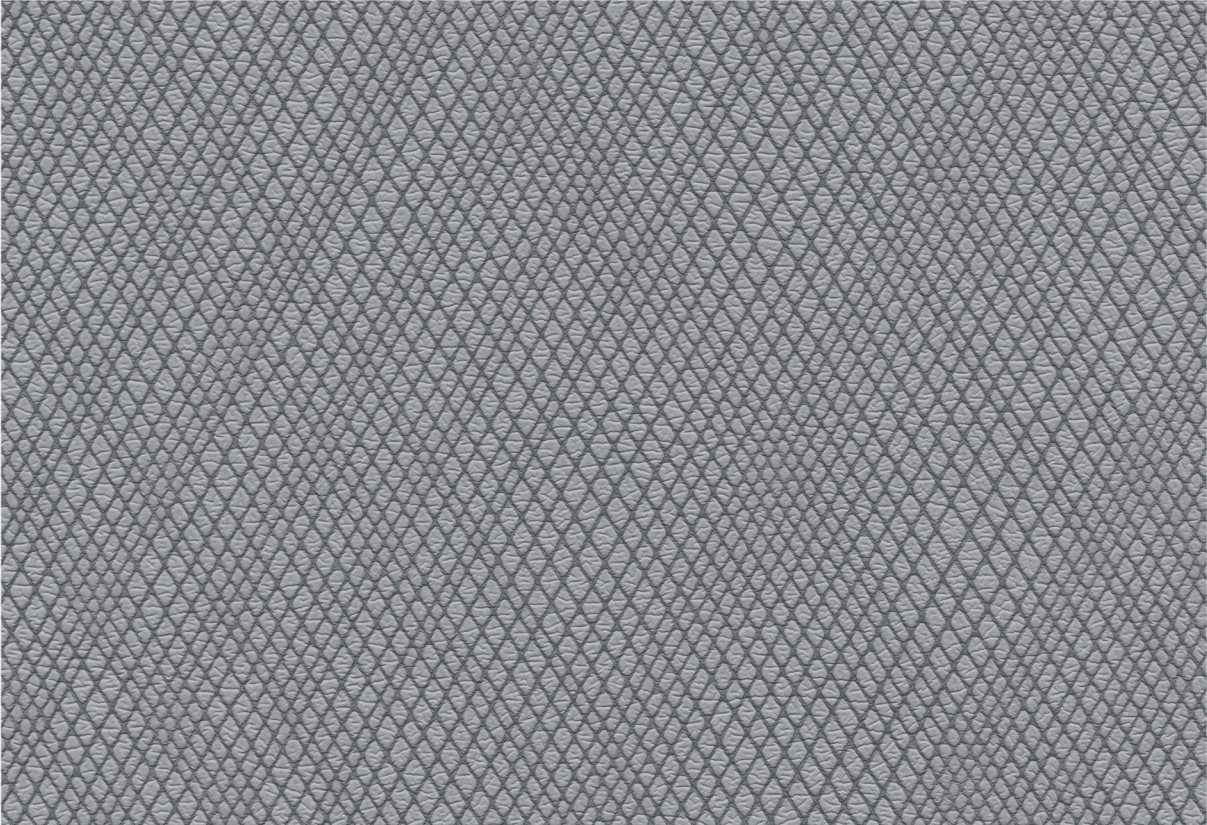

531-5309 Glisten Grey




531-3283 Butter Cookie



531-5266 Lemon Drop



531-2591 Baby Blue




531-6568 Faded Stone




531-3282 Milkshake




531-3284 Sugar Cone




531-8236 Marmalade



531-2592 Aquarius




531-6563 Dust



531-9421 Blackjack




531-3285 Kahlua




531-4306 Rio



531-2779 Hale Navy



531-9326 Acai

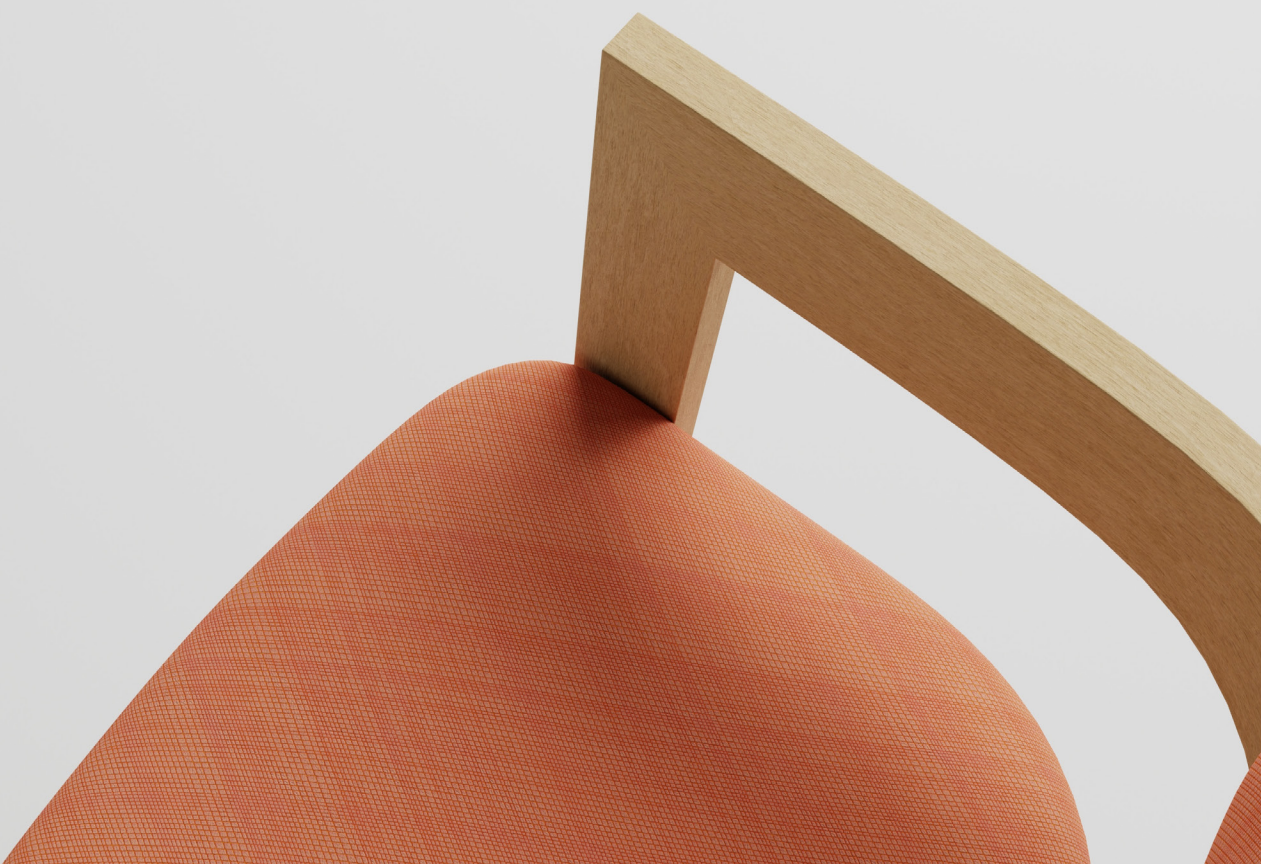

Applications

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
65% Recycled Polyester, 35% FSC/PEFC
Certified Rayon Backing

Width:

54 Inches / 137 Centimetres

Repeat:

27.55"V x 16.61"H / 700mm V x 422mm H

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 200,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

16 Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6
Crocking: AATCC 8, Grade 4-5 Wet & Dry

Environmental

No intentionally added PFAS
SCS Indoor Advantage Gold certified
REACH compliant
Does not contain Red List chemicals



Scan QR code for a full list of specifications.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



ultrafabricsinc.com

Ultrafabrics® and logo, are registered trademarks of Ultrafabrics Inc. Made in Japan.



Uf Select

Swift & Stylish

Uf Select offers a fresh take on creativity and performance for today's competitive and time-sensitive projects. Featuring an inspiring array of textures and colors, this grouping is suitable for accessories, hospitality, residential, recreational vehicles, non-clinical healthcare, and workplace.



Impasto — Uf Select®




733-00613 Ice Storm



733-60973 Almond Milk




733-60943 Arctic Fox



733-53513 Incense




733-35143 Snickerdoodle




733-58843 Thunder




733-73313 Golden Ochre



733-82683 Roasted Squash




733-27743 Bristle Blue



733-43553 Light Moss



733-34673 Tofu




733-33903 Amberglow



733-14263 Mahogany Red



733-27853 Deepwell



733-43393 Avocado



733-33853 Caribou



733-33343 Tiger Eye



733-14413 Firecracker



733-26053 Nocturne Blue



733-43563 Pine Needle



733-60983 Black Spinel



733-34863 Pumpernickel



733-93543 Kalamata



733-43403 Bay Leaf



733-72373 Genesis

Impasto — Uf Select®

Application Interior Upholstery

General Specifications

Composition Polycarbonate Blended Surface | 65% Polyester, 35% Cotton Backing

Weight Approx. 13.1 oz. Per Square Yard | Approx. 445 Grams Per Square Metre

Thickness Approx. 0.95 Millimetres

Width 54 Inches | 137 Centimetres

Repeat None

Performance

Abrasion ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)* | BS EN ISO 12947-2 / 150,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis 10 Weeks | ASTM D3690 Sect. 6.11 (Hydrolytic Stability) | ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating ASTM D751

Tear Strength ASTM D2261

Breaking Strength ASTM D751

Seam Strength ASTM D751 (Tack Tear)

Tensile Strength BS EN ISO 1421

Colorfastness

Light AATCC 16.3, 200 Hours, Grade 4 | ISO 105 B02, Grade 6


Crocking AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

ASTM E84 (Adhered) - Class A | CA TB 117-2013 - Pass | FMVSS 302 - Pass | NFPA 260 - Class 1 | UFAC - Class 1 | AB 2998

For more information on our fabrics, cleaning and care instructions, please visit our website.

Lino — Uf Select®

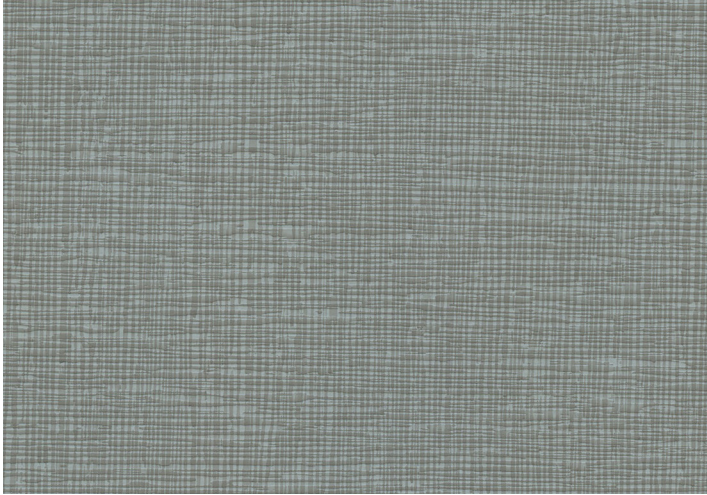

740-58733 Coin




740-34513 Haystack



740-34463 Cider



740-58733 Coin



740-82613 Yarrow




740-00503 White Marigold



740-65783 Wigwam



740-82593 Carrot



740-25143 Bosporous



740-43313 Granny Smith



740-50143 Ore




740-33793 Hearth



740-82603 Adobe Red



740-25123 Independence




740-43303 Verde




740-50193 Lead




740-34063 Trunk



740-13943 Plum Wine



740-43323 Jadite



740-43373 Pinenut

Lino — Uf Select®

Application Interior Upholstery

General Specifications

Composition Polycarbonate Blended Surface | 65% Polyester, 35% Cotton Backing

Weight Approx. 13.1 oz. Per Square Yard | Approx. 445 Grams Per Square Metre

Thickness Approx. 0.95 Millimetres

Width 54 Inches | 137 Centimetres

Repeat None

Performance

Abrasion ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)* | BS EN ISO 12947-2 / 150,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis 10 Weeks | ASTM D3690 Sect. 6.11 (Hydrolytic Stability) | ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating ASTM D751

Tear Strength ASTM D2261

Breaking Strength ASTM D751

Seam Strength ASTM D751 (Tack Tear)

Tensile Strength BS EN ISO 1421

Colorfastness

Light AATCC 16.3, 200 Hours, Grade 4 | ISO 105 B02, Grade 6

Crocking AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

ASTM E84 (Adhered) - Class A | CA TB 117-2013 - Pass | FMVSS 302 - Pass | NFPA 260 - Class 1 | UFAC - Class 1 | AB 2998

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of: BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5) | BS EN 1021 Part 1 & 2 (Cig & Match)

For more information on our fabrics, cleaning and care instructions, please visit our website.

ultrafabricsinc.com

Ultrafabrics® and logo, and Uf Select® are registered trademarks of Ultrafabrics Inc. Made in Mexico.



Montage — Uf Select®



744-33373 Alpaca



744-00513 White Marble



744-35723 Jojoba



744-35733 Alfalfa



744-52783 Silver Birch




744-56303 Silver Ash



744-53503 Ganache



744-53493 Ghost




744-50393 Horseradish




744-53583 Oakmoss



744-60883 Cast Iron



744-60873 Gris



744-53473 Smoke Gray



744-35573 Acacia




744-53483 Beechnut



744-35593 String




744-73323 Chimera



744-14403 Mimosa



744-53453 Gull




744-43493 Grasshopper




744-35563 Cord




744-35553 Old Penny



744-93053 Passion Fruit



744-25033 Copen Blue



744-43503 Jalapeno




744-52173 Wax




744-82663 Chutney



744-93533 Mulled Wine



744-27873 Provence



744-43253 Sorrel




744-35673 Cinnamon Toast



744-14393 Tobacco Brown



744-14233 Red Rock



744-27863 Blue Graphite



744-43243 Balsam




744-36473 Cardamom




744-14223 Firebrick



744-14423 Poinsettia Red




744-26543 Bluestone



744-72353 Beryl




744-36513 Tarmac




744-82673 Orange Pepper



744-14453 Vivid Punch



744-25063 Indigo Batik



744-72313 Bluegrass

Montage — Uf Select®

Application Interior Upholstery

General Specifications

Composition Polycarbonate Blended Surface | 65% Polyester, 35% Cotton Backing

Weight Approx. 13.1 oz. Per Square Yard | Approx. 445 Grams Per Square Metre

Thickness Approx. 0.95 Millimetres

Width 54 Inches | 137 Centimetres

Repeat None

Performance

Abrasion ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)* | BS EN ISO 12947-2 / 150,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis 10 Weeks | ASTM D3690 Sect. 6.11 (Hydrolytic Stability) | ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating ASTM D751

Tear Strength ASTM D2261

Breaking Strength ASTM D751

Seam Strength ASTM D751 (Tack Tear)

Tensile Strength BS EN ISO 1421

Colorfastness

Light AATCC 16.3, 200 Hours, Grade 4 | ISO 105 B02, Grade 6

Crocking AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

ASTM E84 (Adhered) - Class A | CA TB 117-2013 - Pass | FMVSS 302 - Pass | NFPA 260 - Class 1 | UFAC - Class 1 | AB 2998

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:
BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5) | BS EN 1021 Part 1 & 2 (Cig & Match)

For more information on our fabrics, cleaning and care instructions, please visit our website.

ultrafabricsinc.com

Ultrafabrics® and logo, and Uf Select® are registered trademarks of Ultrafabrics Inc. Made in Mexico.

