



Impasto — Uf Select®



733-00613 Ice Storm



733-60973 Almond Milk

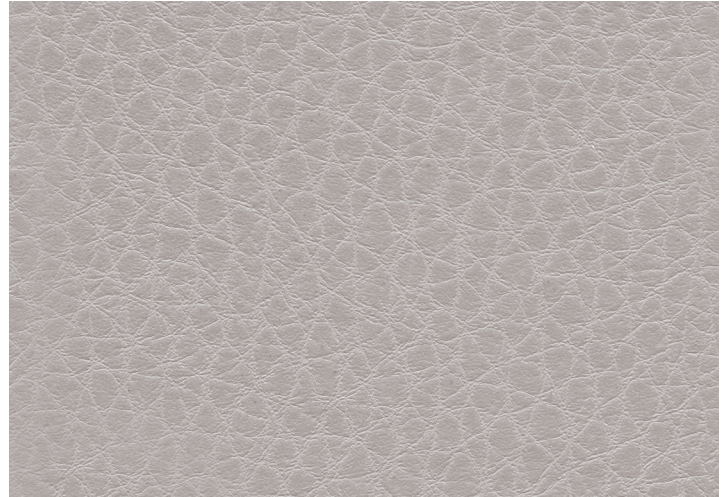


733-60943 Arctic Fox



733-53513 Incense




733-35143 Snickerdoodle




733-58843 Thunder



733-73313 Golden Ochre



733-82683 Roasted Squash




733-27743 Bristle Blue



733-43553 Light Moss



733-34673 Tofu



733-33903 Amberglow




733-14263 Mahogany Red



733-27853 Deepwell



733-43393 Avocado



733-33853 Caribou



733-33343 Tiger Eye



733-14413 Firecracker



733-26053 Nocturne Blue



733-43563 Pine Needle



733-60983 Black Spinel



733-34863 Pumpernickel



733-93543 Kalamata



733-43403 Bay Leaf



733-72373 Genesis

Impasto — Uf Select®

Application Interior Upholstery

General Specifications

Composition Polycarbonate Blended Surface | 65% Polyester, 35% Cotton Backing

Weight Approx. 12.53 oz. Per Square Yard | Approx. 425 Grams Per Square Metre

Thickness Approx. 0.95 Millimetres

Width 54 Inches | 137 Centimetres

Repeat None

Performance

Abrasion ASTM D4157 / 200,000 Double Rubs (Wyzenbeek)* | BS EN ISO 12947-2 / 150,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis 10 Weeks | ASTM D3690 Sect. 6.11 (Hydrolytic Stability) | ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating ASTM D751

Tear Strength ASTM D2261

Breaking Strength ASTM D751

Seam Strength ASTM D751 (Tack Tear)

Tensile Strength BS EN ISO 1421

Colorfastness

Light AATCC 16.3, 200 Hours, Grade 4 | ISO 105 B02, Grade 6

Crocking AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

ASTM E84 (Adhered) - Class A | CA TB 117-2013 - Pass | FMVSS 302 - Pass | NFPA 260 - Class 1 | UFAC - Class 1 | AB 2998

For more information on our fabrics, cleaning and care instructions, please visit our website.